


TRANSFORMER 3382

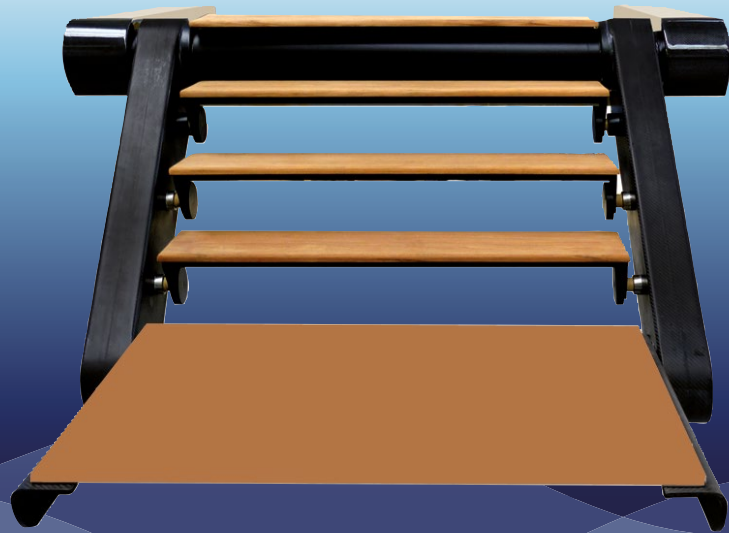

model	N° steps	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	H (mm/ inch)	X (mm/ inch)	Y (mm/ inch)	dynamic load (kg/lbs)	static load (kg/lbs)	weight (kg/lbs)
3382/40.0	4	2925 / 115"	1210 / 47"	850 / 33"	980 / 39"	1090 / 43"	1165 / 46"	1840 / 72"2/5	250 / 9" 5/6	695 / 27"	920 / 36"	600/1320	900/1984	600/1320
3382/50.0	5	3660 / 144"	1455 / 57"	1100 / 43"	1225 / 48"	1340 / 53"	1165 / 46"	1840 / 72"2/5	250 / 9" 5/6	865 / 34"	1160 / 46"	420/950	750/1653	670/1480
TRANSFORMER WITH POP-OUT SYSTEM														
3382/40.1	4	2925 / 115"	1210 / 47"	850 / 33"	980 / 39"	1090 / 43"	1165 / 46"	1840 / 72"2/5	420 / 16" 1/2	695 / 27"	920 / 36"	600/1320	900/1984	850/1870
3382/50.1	5	3660 / 144"	1455 / 57"	1100 / 43"	1225 / 48"	1340 / 53"	1165 / 46"	1840 / 72"2/5	420 / 16" 1/2	865 / 34"	1160 / 46"	420/950	750/1653	935/2060
FOR POP-OUT DIMENSIONS SEE PAGE MODEL 3370/3762														


MULTIFUNCTIONAL PLATFORM.

The loading capacity includes the total platform weight (at shipyard's care), the full loaded tender or the jet ski.

The declared lifting capacity is assured if the load is positioned in the middle of measure C.

NEVER USE THE TRANSFORMER AS A SPRINGBOARD. DIVING MAY CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE TRANSFORMER AND ITS FASTENING ELEMENTS.

This model is also available with carbon fibre structure and fairing resulting in much lighter transformer. The declared lifting capacity is assured if the load is positioned in the middle of measure C

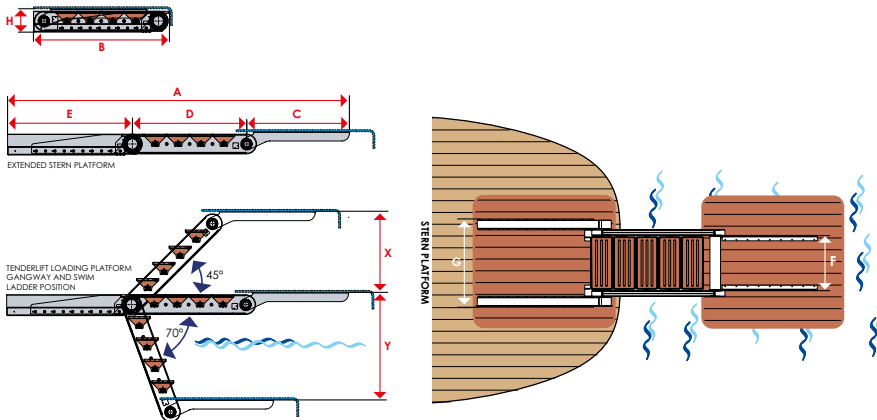

*Structure and fairing made in CARBON FIBRE

* All pictures in the catalogue are for example purpose only.