


# MULTIFUNCTIONAL GANGWAY 3622CS

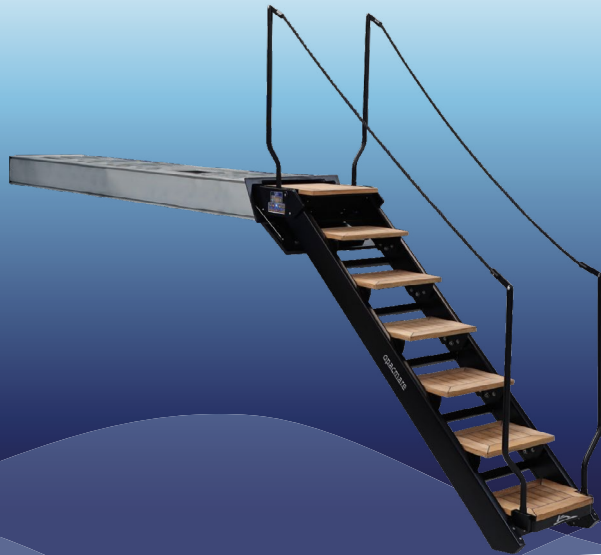

model	A (mm/ inch)	B (mm/ inch)	C (mm/ inch)	D (mm/ inch)	E (mm/ inch)	F (mm/ inch)	G (mm/ inch)	H (mm/ inch)	L (mm/ inch)	M (mm/ inch)	$\alpha$	$\beta$	n° steps	weight (kg/lbs)
3622C/21.01	2061 81"	3310 130"3/10	259 10"1/5	-	1470 57"9/10	1026 40"2/5	560	241 9"1/2	710 28"	245 9"3/5	-	55°	7	395/870
3622C/21.02	2075 81"7/10	3055 120"1/4	262 10"3/10	1159 45"3/5	1155 45"1/2	1386 54"3/5	426 16"3/4	206 8"1/10	590 23"1/5	193 7"3/5	40°	40°	7	366/810
3622C/24	2387 94"	3504 138"	237 9"1/3	1265 49"4/5	1558 61"1/3	1447 57"	560	241 9"1/2	710 28"	180 7"	37°	48°	8	462/1020
3622SC/21	2147 84"1/2	2985 117"1/2	332 13"	1159 45"3/5	1155 45"1/2	1388 54"3/5	426 16"3/4	206 8"1/10	590 23"1/5	193 7"3/5	40°	40°	7	334/740
3622SC/22	2187 86"1/10	3315 130"1/2	372 14"3/5	1159 45"3/5	1155 45"1/2	1388 54"3/5	426 16"3/4	206 8"1/10	590 23"1/5	193 7"3/5	40°	40°	7	360/790
3622SC/25	2371 93"1/3	3258 128"1/4	418 16"1/2	1195 47"	1270 50"	1420 55"9/10	510	241 9"1/2	660 26"	199 7"4/5	41,5°	45°	7	426/940

This gangway allows the boarding of 150 Kg / 330 lbs maximum (one person at a time).

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.

OPTIONAL LANDING AND XXL BOX

