


# STAINLESS STEEL BOX GANGWAY WITH SPECIAL TROLLEY

## 1424 EXTRA SMALL BOX

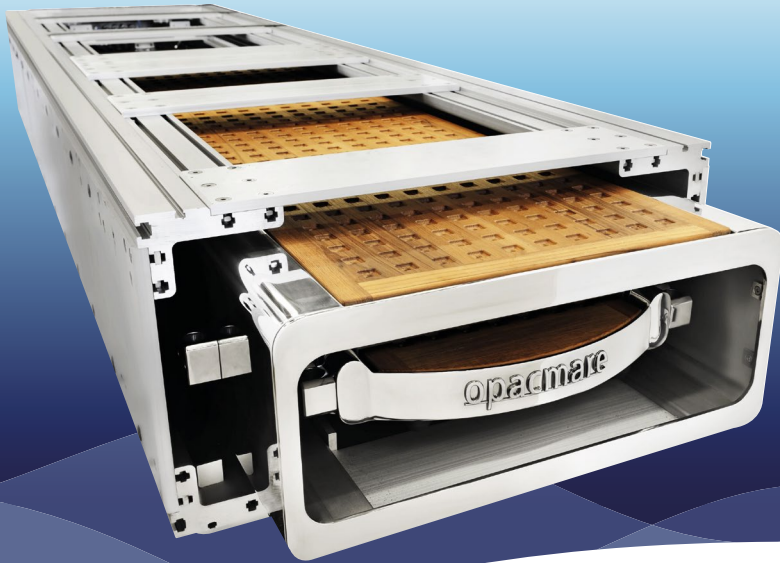

model	A (mm/inch)	B (mm/inch)	C (mm/inch)	D (mm/inch)	L (mm/inch)	H (mm/inch)	$\alpha$	$\beta$	weight (kg/lbs)
1424/38	3745 148"	2230 88"	1240 49"	2505 99"	750 29"	385 15"	15°	15°	455/1000
1424/43	4315 170"	2430 96"	1440 57"	2875 113"	750 29"	385 15"	15°	15°	488/1075
1424/53	5330 210"	2890 114"	1800 71"	3530 140"	750 29"	385 15"	15°	15°	593/1310
1424/61	6080 240"	3230 127"	2040 80"	4040 160"	750 29"	385 15"	15°	15°	720/1585
1424/66	6590 260"	3570 140"	2180 86"	4410 174"	750 29"	385 15"	15°	15°	840/1850
1424/75	7480 295"	3930 155"	2440 96"	5040 199"	750 29"	385 15"	15°	15°	985/2170

This gangway allows the boarding of 150 Kg / 330 lbs maximum (one person at a time).

A= maximum length of gangway outside of the box

B= box length

C= distance between the gangway hinges and the box

H= box height

L= box width

$\alpha$  and  $\beta$ = the total angle the gangway can achieve.

With manual stanchions

NEVER USE THE GANGWAY AS SPRINGBOARD. DIVING COULD CAUSE STRONG STRAINS THAT MIGHT DAMAGE THE GANGWAY AND ITS FASTENING ELEMENTS.

